

Motor starter SIRIUS 3RM1 Reversing starter SAFETY 500 V; 0.4-2.0 A; 110-230 V AC Control circuit push-in Main circuit screw terminal



Figure similar

Product brand name	SIRIUS
Product category	Motor starter
Product designation	Failsafe reversing starters
Design of the product	With electronic overload protection and safety-related disconnection
Product type designation	3RM1

General technical data	
Trip class	CLASS 10A
Product function	
• Intrinsic device protection	Yes
Suitability for operation Device connector 3ZY12	No
Power loss [W] typical	0.3 W
Insulation voltage	
• rated value	500 V
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	500 V

• between control and auxiliary circuit	250 V
<b>Protection class IP</b>	IP20
<b>Shock resistance</b>	6g / 11 ms
<b>Vibration resistance</b>	1 ... 6 Hz, 15 mm; 20 m/s <sup>2</sup> , 500 Hz
<b>Operating frequency maximum</b>	1 1/s
<b>Mechanical service life (switching cycles)</b>	
• typical	30 000 000
<b>Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750</b>	Q
<b>Reference code acc. to DIN EN 81346-2</b>	Q
<b>Reference code acc. to DIN EN 61346-2</b>	Q
<b>Product function</b>	
• direct start	No
• reverse starting	Yes
<b>Product function Short circuit protection</b>	No

#### Electromagnetic compatibility

<b>Conducted interference</b>	
• due to burst acc. to IEC 61000-4-4	3 kV / 5 kHz
• due to conductor-earth surge acc. to IEC 61000-4-5	4 kV signal lines 2 kV
• due to conductor-conductor surge acc. to IEC 61000-4-5	2 kV
• due to high-frequency radiation acc. to IEC 61000-4-6	10 V
<b>Electrostatic discharge acc. to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge
<b>Conducted HF-interference emissions acc. to CISPR11</b>	Class B for domestic, business and commercial environments; Class A for industrial environments at 110 V DC
<b>Field-bound HF-interference emission acc. to CISPR11</b>	Class B for domestic, business and commercial environments; Class A for industrial environments at 110 V DC

#### Safety related data

<b>Safety device type acc. to IEC 61508-2</b>	Type B
<b>Safety Integrity Level (SIL) acc. to IEC 61508</b>	3
<b>Performance level (PL) acc. to EN ISO 13849-1</b>	e
<b>Category acc. to EN ISO 13849-1</b>	4
<b>Stop category acc. to DIN EN 60204-1</b>	0
<b>Safe failure fraction (SFF)</b>	99.4 %
<b>Average diagnostic coverage level (DCavg)</b>	99 %
<b>Diagnostics test interval by internal test function maximum</b>	600 s
<b>Function test interval maximum</b>	1 y
<b>Failure rate [FIT]</b>	
• at rate of recognizable hazardous failures ( $\lambda_{dd}$ )	1 400 FIT

<ul style="list-style-type: none"> <li>• at rate of non-recognizable hazardous failures (Adu)</li> </ul>	16 FIT
PFHD with high demand rate acc. to EN 62061	0.00000002 1/h
PFDavg with low demand rate acc. to IEC 61508	0.000018
MTTFd	75 y
Hardware fault tolerance acc. to IEC 61508	1
T1 value for proof test interval or service life acc. to IEC 61508	20 y
Safe state	Load circuit open
Protection against electrical shock	finger-safe
Off-delay time with safety-related request when switched off via control inputs maximum	65 ms
Off-delay time with safety-related request when switched off via supply voltage maximum	120 ms
Hardware fault tolerance acc. to IEC 61508 relating to ATEX	0
PFDavg with low demand rate acc. to IEC 61508 relating to ATEX	0.0005
PFHD with high demand rate acc. to EN 62061 relating to ATEX	0.00000005 1/h
Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX	SIL2
T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX	3 y

#### Inputs/ Outputs

<b>Input voltage at digital input</b> <ul style="list-style-type: none"> <li>• at DC rated value</li> <li>• with signal &lt;0&gt; at DC</li> <li>• for signal &lt;1&gt; at DC</li> </ul>	110 V 0 ... 40 V 79 ... 121
<b>Input voltage at digital input</b> <ul style="list-style-type: none"> <li>• at AC rated value</li> <li>• with signal &lt;0&gt; at AC</li> <li>• for signal &lt;1&gt; at AC</li> </ul>	110 V 0 ... 40 V 93 ... 253 V
<b>Input current at digital input</b> <ul style="list-style-type: none"> <li>• with signal &lt;0&gt; typical</li> <li>• for signal &lt;1&gt; typical</li> </ul>	0.0004 A 0.002 A
<b>Input current at digital input</b> <ul style="list-style-type: none"> <li>• for signal &lt;1&gt; at DC</li> <li>• with signal &lt;0&gt; at DC</li> </ul>	1.5 mA 0.25 mA
<b>Input current at digital input with signal &lt;0&gt; at AC</b> <ul style="list-style-type: none"> <li>• at 110 V</li> <li>• at 230 V</li> </ul>	0.2 mA 0.4 mA
<b>Input current at digital input for signal &lt;1&gt; at AC</b> <ul style="list-style-type: none"> <li>• at 110 V</li> </ul>	1.1 mA

- at 230 V

2.3 mA

## Response times

Switch-on delay time	90 ... 120 ms
Off-delay time	60 ... 90 ms

## Main circuit

Number of poles for main current circuit	3
Adjustable pick-up value current of the current-dependent overload release	0.4 ... 2 A
Minimum load [%]	20 %
Type of the motor protection	solid-state
Operating voltage <ul style="list-style-type: none"> <li>• rated value</li> </ul>	48 ... 500 V
Relative symmetrical tolerance of the operating voltage	10 %
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
Relative symmetrical tolerance of the operating frequency	10 %
Operating current <ul style="list-style-type: none"> <li>• at AC at 400 V rated value</li> <li>• at AC-53a at 400 V at ambient temperature 40 °C rated value</li> </ul>	2 A 2 A
Ampacity when starting maximum	16 A
Operating power for three-phase motors at 400 V at 50 Hz	0.09 ... 0.75 kW

## Control circuit/ Control

Type of voltage of the control supply voltage	AC/DC
Control supply voltage 1 at AC <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>	110 ... 230 V 110 ... 230 V
Control supply voltage frequency <ul style="list-style-type: none"> <li>• 1 rated value</li> <li>• 2 rated value</li> </ul>	50 Hz 60 Hz
Control supply voltage 1 <ul style="list-style-type: none"> <li>• at DC rated value</li> </ul>	110 V
Operating range factor control supply voltage rated value at DC <ul style="list-style-type: none"> <li>• initial value</li> <li>• Full-scale value</li> </ul>	0.85 1.1
Operating range factor control supply voltage rated value at AC at 50 Hz <ul style="list-style-type: none"> <li>• initial value</li> </ul>	0.85

• Full-scale value	1.1
<b>Operating range factor control supply voltage rated value at AC at 60 Hz</b>	
• initial value	1.1
• Full-scale value	0.85
<b>Control current at AC</b>	
• at 110 V in standby mode	8 mA
• at 230 V in standby mode	6 mA
• at 110 V when switching on	40 mA
• at 230 V when switching on	25 mA
• at 110 V during operation	25 mA
• at 230 V during operation	14 mA
<b>Control current at DC</b>	
• in standby mode	4 mA
• when switching on	13 mA
• during operation	30 mA
<b>Switch-on delay time</b>	90 ... 120 ms
<b>Off-delay time</b>	60 ... 90 ms
<b>Number of CO contacts for auxiliary contacts</b>	1
<b>Operating current of auxiliary contacts at AC-15 at 230 V maximum</b>	3 A
<b>Operating current of auxiliary contacts at DC-13 at 24 V maximum</b>	1 A

Installation/ mounting/ dimensions	
<b>Mounting position</b>	vertical, horizontal, standing (observe derating)
<b>Mounting type</b>	screw and snap-on mounting onto 35 mm standard mounting rail
<b>Height</b>	100 mm
<b>Width</b>	22.5 mm
<b>Depth</b>	141.6 mm
<b>Required spacing</b>	
• with side-by-side mounting	
— forwards	0 mm
— Backwards	0 mm
— upwards	50 mm
— downwards	50 mm
— at the side	0 mm
• for grounded parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	50 mm
— at the side	3.5 mm
— downwards	50 mm

## Ambient conditions

<b>Installation altitude at height above sea level</b> <ul style="list-style-type: none"><li>• maximum</li></ul>	2 000 m
<b>Ambient temperature</b> <ul style="list-style-type: none"><li>• during operation</li><li>• during storage</li><li>• during transport</li></ul>	-25 ... +60 °C -40 ... +70 °C -40 ... +70 °C
Relative humidity during operation	10 ... 95 %
<b>Air pressure</b> <ul style="list-style-type: none"><li>• acc. to SN 31205</li></ul>	900 ... 1 060 hPa

## Communication/ Protocol

<b>Product function Bus communication</b>	No
---	----

## Connections/Terminals


<b>Type of electrical connection</b> <ul style="list-style-type: none"><li>• for main current circuit</li><li>• for auxiliary and control current circuit</li></ul>	screw-type terminals for main circuit, PUSH-IN connection (spring-loaded connection) for control circuit screw-type terminals PUSH-IN connection (spring-loaded connection)
<b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"><li>• for main contacts<ul style="list-style-type: none"><li>— solid</li><li>— finely stranded with core end processing</li></ul></li><li>• at AWG conductors for main contacts</li></ul>	1x (0,5 ... 4 mm <sup>2</sup> ), 2x (0,5 ... 2,5 mm <sup>2</sup> ) 1x (0,5 ... 4 mm <sup>2</sup> ), 2x (0,5 ... 1,5 mm <sup>2</sup> ) 1x (20 ... 12), 2x (20 ... 14)
<b>Connectable conductor cross-section for main contacts</b> <ul style="list-style-type: none"><li>• single or multi-stranded</li><li>• finely stranded with core end processing</li></ul>	0.5 ... 4 mm <sup>2</sup> 0.5 ... 4 mm <sup>2</sup>
<b>Connectable conductor cross-section for auxiliary contacts</b> <ul style="list-style-type: none"><li>• single or multi-stranded</li><li>• finely stranded with core end processing</li><li>• finely stranded without core end processing</li></ul>	0.5 ... 1.5 mm <sup>2</sup> 0.5 ... 1 mm <sup>2</sup> 0.5 ... 1.5 mm <sup>2</sup>
<b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"><li>• for auxiliary contacts<ul style="list-style-type: none"><li>— solid</li><li>— finely stranded with core end processing</li><li>— finely stranded without core end processing</li></ul></li><li>• at AWG conductors for auxiliary contacts</li></ul>	1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ) 1x (0,5 ... 1,0 mm <sup>2</sup> ), 2x (0,5 ... 1,0 mm <sup>2</sup> ) 1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ) 1x (20 ... 16), 2x (20 ... 16)
<b>AWG number as coded connectable conductor cross section</b> <ul style="list-style-type: none"><li>• for main contacts</li><li>• for auxiliary contacts</li></ul>	20 ... 12 20 ... 16

## UL/CSA ratings

<b>Full-load current (FLA) for three-phase AC motor</b>	
• at 480 V rated value	2 A
<b>Yielded mechanical performance [hp]</b>	
• for single-phase AC motor	
— at 230 V rated value	0.125 hp
• for three-phase AC motor	
— at 200/208 V rated value	0.333 hp
— at 220/230 V rated value	0.333 hp
— at 460/480 V rated value	0.75 hp

## Certificates/approvals

General Product Approval		For use in hazardous locations	Functional Safety/Safety of Machinery
			
CCC	CSA	UL	ATEX
			<a href="#">Type Examination</a>

Declaration of Conformity	other
	<a href="#">Confirmation</a>
EG-Konf.	

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1302-3AA14>

### Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1302-3AA14>


### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)




<https://support.industry.siemens.com/cs/ww/en/ps/3RM1302-3AA14>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RM1302-3AA14&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RM1302-3AA14&lang=en)

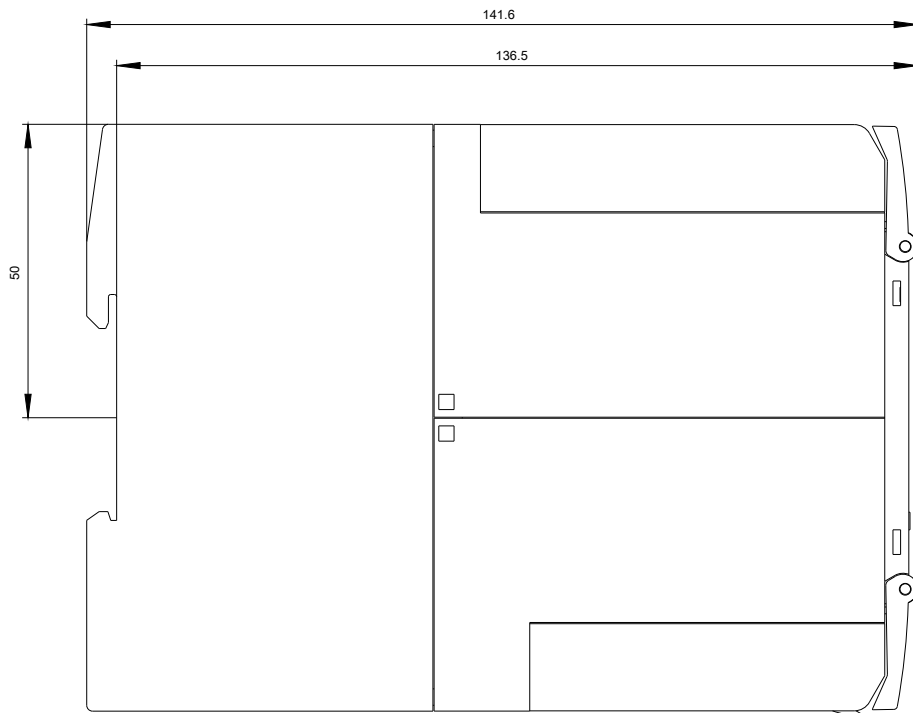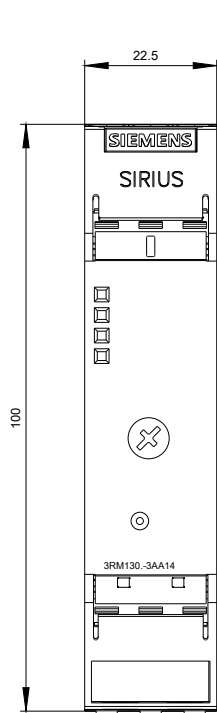

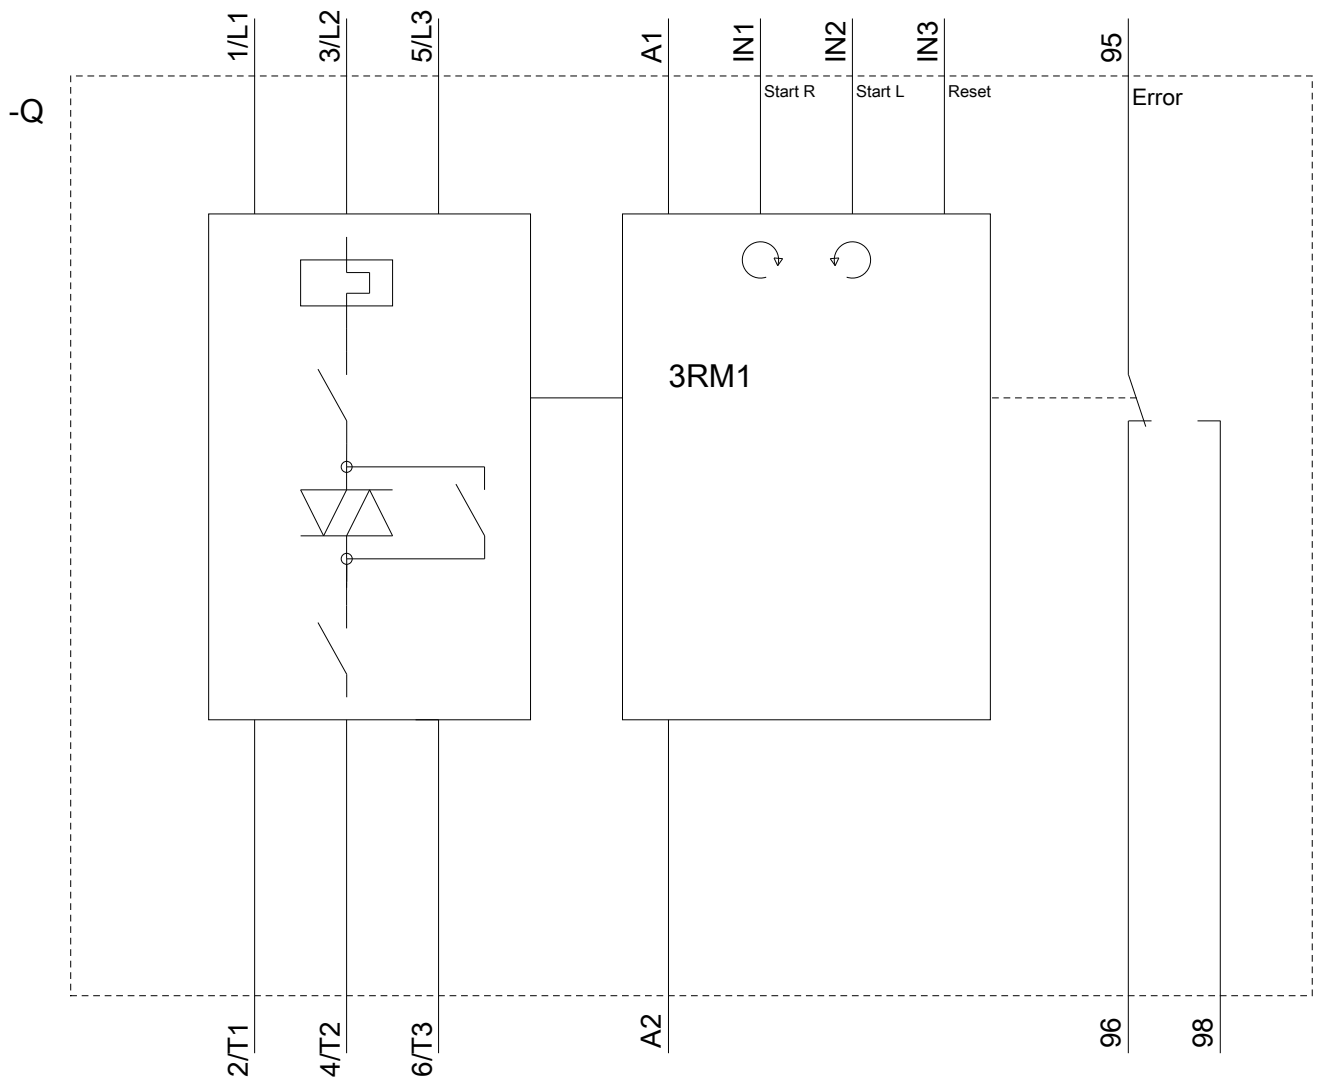

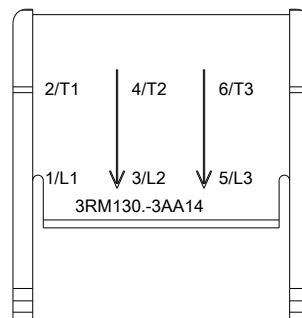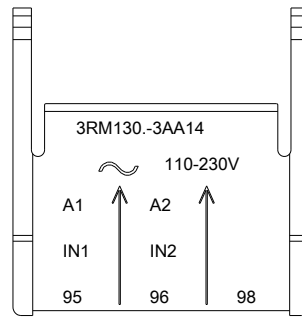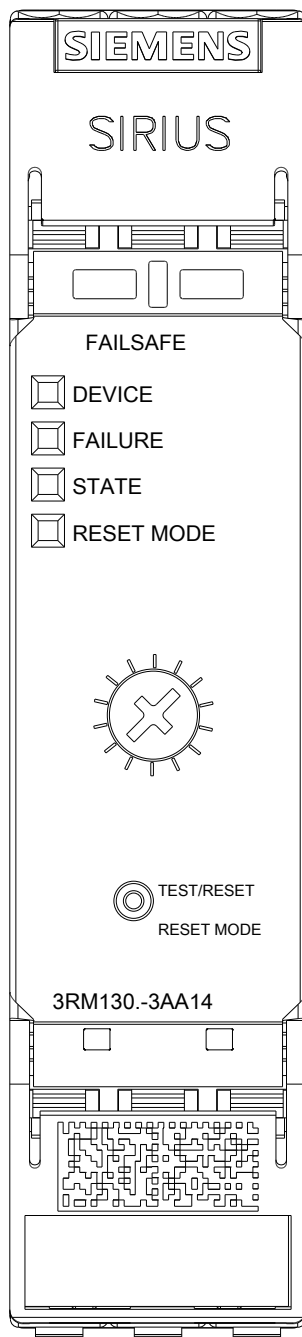

last modified:

09/16/2018