SIEMENS

product brand name

Data sheet 3RW5076-2TB14

SIRIUS



SIRIUS soft starter 200-480 V 470 A, 110-250 V AC Spring-loaded terminals Thermistor input





product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW50
manufacturer's article number	
 of standard HMI module usable 	3RW5980-0HS01
 of high feature HMI module usable 	3RW5980-0HF00
 of communication module PROFINET standard usable 	3RW5980-0CS00
 of communication module PROFIBUS usable 	3RW5980-0CP00
 of communication module Modbus TCP usable 	3RW5980-0CT00
 of communication module Modbus RTU usable 	3RW5980-0CR00
 of communication module Ethernet/IP 	3RW5980-0CE00
 of circuit breaker usable at 400 V 	3VA2580-6HN32-0AA0; Type of assignment 1, Iq = 65 kA
 of circuit breaker usable at 500 V 	3VA2580-6HN32-0AA0; Type of assignment 1, Iq = 65 kA
 of the gG fuse usable up to 690 V 	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NE1 436-2; Type of coordination 2, Iq = 65 kA
 of back-up R fuse link for semiconductor protection usable up to 690 V 	3NE3 340-8; Type of coordination 2, Iq = 65 kA
 of line contactor usable up to 480 V 	<u>3RT1076</u>
 of line contactor usable up to 690 V 	<u>3RT1076</u>
General technical data	
starting voltage [%]	30 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 20 s
ramp-down time of soft starter	0 20 s
current limiting value [%] adjustable	130 700 %
certificate of suitability	
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	
HMI-High Feature	No
• is supported HMI-Standard	Yes
is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	2
buffering time in the event of power failure	

e for main ourront oirquit	100 mg
for main current circuit for control circuit	100 ms
• for control circuit	100 ms
insulation voltage rated value	600 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 600 V
service factor	1
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
between main and auxiliary circuit	600 V
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
utilization category according to IEC 60947-4-2	AC-53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	09/23/2019
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1
Weight	8.3 kg
product function	
ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
Soft Torque	Yes
 adjustable current limitation 	Yes
pump ramp down	Yes
 intrinsic device protection 	Yes
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)
 evaluation of thermistor motor protection 	Yes; Type A PTC or Klixon / Thermoclick
auto-RESET	Yes
manual RESET	Yes
• remote reset	Yes; By turning off the control supply voltage
 communication function 	Yes
 operating measured value display 	Yes; Only in conjunction with special accessories
error logbook	Yes; Only in conjunction with special accessories
 via software parameterizable 	No
 via software configurable 	Yes
PROFlenergy	Yes; in connection with the PROFINET Standard communication module
voltage ramp	Yes
torque control	No
analog output	No
Power Electronics	
operational current	
at 40 °C rated value	470 A
at 50 °C rated value	416 A
at 60 °C rated value	380 A
operating voltage	
• rated value	200 480 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
operating power for 3-phase motors	
at 230 V at 40 °C rated value	132 kW
at 400 V at 40 °C rated value	250 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative negative tolerance of the operating frequency	10 %
adjustable motor current	10 /0
-	200 A
 at rotary coding switch on switch position 1 at rotary coding switch on switch position 2 	200 A 218 A

 at rotary coding switch on switch position 3 	236 A
 at rotary coding switch on switch position 4 	254 A
 at rotary coding switch on switch position 5 	272 A
 at rotary coding switch on switch position 6 	290 A
 at rotary coding switch on switch position 7 	308 A
 at rotary coding switch on switch position 8 	326 A
at rotary coding switch on switch position 9	344 A
at rotary coding switch on switch position 10	362 A
at rotary coding switch on switch position 11	380 A
at rotary coding switch on switch position 12	398 A
at rotary coding switch on switch position 13	416 A
at rotary coding switch on switch position 14	434 A
at rotary coding switch on switch position 15	452 A
at rotary coding switch on switch position 16 at rotary coding switch on switch position 16	470 A
minimum	200 A
minimum load [%]	15 %; Relative to smallest settable le
	15 %, Relative to Stilallest settable le
power loss [W] for rated value of the current at AC	EC W
• at 50 °C after startup	56 W
• at 50 °C after startup	44 W
• at 60 °C after startup	37 W
power loss [W] at AC at current limitation 350 %	
• at 40 °C during startup	5 344 W
 at 50 °C during startup 	4 438 W
at 60 °C during startup	3 876 W
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
at 50 Hz	110 250 V
• at 60 Hz	110 250 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 % _
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %
control supply voltage frequency	50 60 Hz
The second secon	
relative negative tolerance of the control supply voltage frequency	-10 %
frequency relative positive tolerance of the control supply voltage frequency	10 %
relative positive tolerance of the control supply voltage	10 % 30 mA
frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value	10 % 30 mA 105 mA
frequency relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value	10 % 30 mA
relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum	10 % 30 mA 105 mA 2.2 A 12.2 A
relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage	10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms
relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply	10 % 30 mA 105 mA 2.2 A 12.2 A
relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage	10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of
relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit	10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit
relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit	10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs	10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs	10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable	10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version	10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO)
relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs	10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs	10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu=600 A), C6 miniature circuit breaker (Icu=300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 0
relative positive tolerance of the control supply voltage frequency control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable digital output version number of analog outputs	10 % 30 mA 105 mA 2.2 A 12.2 A 2.2 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO)

nstallation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing
height	230 mm
width	160 mm
depth	282 mm
required spacing with side-by-side mounting	
• forwards	10 mm
• backwards	0 mm
• upwards	100 mm
• downwards	75 mm
at the side	5 mm
weight without packaging	7.3 kg
onnections/ Terminals	1.0.10
type of electrical connection	
for main current circuit	busbar connection
for control circuit	
	spring-loaded terminals
width of connection bar maximum	35 mm; with connection cover 3RT1966-4EA1 maximum length 45 mm
wire length for thermistor connection	FO
with conductor cross-section = 0.5 mm² maximum with conductor cross-section = 1.5 mm² maximum	50 m
with conductor cross-section = 1.5 mm² maximum	150 m
with conductor cross-section = 2.5 mm² maximum	250 m
type of connectable conductor cross-sections for main contacts for box terminal	
using the front clamping point solid	95 300 mm²
using the front clamping point solid using the front clamping point finely stranded with core	70 240 mm²
end processing	70 240 Hilli
 using the front clamping point finely stranded without core end processing 	70 240 mm²
 using the front clamping point stranded 	95 300 mm²
 using the back clamping point solid 	120 240 mm²
r box terminal using the back clamping point	250 500 kcmil
using both clamping points solid	min. 2x 70 mm², max. 2x 240 mm²
using both clamping points finely stranded with core end processing	min. 2x 50 mm², max. 2x 185 mm²
using both clamping points finely stranded without core end processing	min. 2x 50 mm², max. 2x 185 mm²
using both clamping points stranded	min. 2x 70 mm², max. 2x 240 mm²
using the back clamping point finely stranded with core	120 185 mm²
end processing • using the back clamping point finely stranded without core	120 185 mm ²
end processing	
 using the back clamping point stranded 	120 240 mm²
type of connectable conductor cross-sections	
for AWG cables for main current circuit solid	2/0 500 kcmil
• for DIN cable lug for main contacts stranded	50 240 mm²
for DIN cable lug for main contacts finely stranded	70 240 mm²
type of connectable conductor cross-sections	
for control circuit solid	2x (0.25 1.5 mm²)
for control circuit finely stranded with core end processing	2x (0.25 1.5 mm²)
for AWG cables for control circuit solid	2x (24 16)
for AWG cables for control circuit finely stranded with core end processing	2x (24 16)
wire length	
between soft starter and motor maximum	800 m
at the digital inputs at AC maximum	1 000 m
	1 000 111
e for main contacts with coron type terminals	14 24 N.m
for main contacts with screw-type terminals for auxiliary and control contacts with across type	14 24 N·m
 for auxiliary and control contacts with screw-type terminals 	0.8 1.2 N·m
tightening torque [lbf·in]	
for main contacts with screw-type terminals	124 210 lbf-in
for auxiliary and control contacts with screw-type	7 10.3 lbf·in

terminals	
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; derating as of 1000 m, see Manual
ambient temperature	
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
during storage and transport	-40 +80 °C
environmental category	
during operation according to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
 during storage according to IEC 60721 	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
during transport according to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
invironmental footprint	
global warming potential [CO2 eq] total	464 kg
global warming potential [CO2 eq] during manufacturing	87.4 kg
global warming potential [CO2 eq] during sales	2.05 kg
global warming potential [CO2 eq] during operation	407 kg
global warming potential [CO2 eq] after end of life	-32.4 kg
Siemens Eco Profile (SEP)	Siemens EcoTech
Electromagnetic compatibility	
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
PROFINET standard	Yes
EtherNet/IP	Yes
Modbus RTU	Yes
Modbus TCP	Yes
• PROFIBUS	Yes
JL/CSA ratings	
manufacturer's article number	
• of the fuse	
usable for Standard Faults up to 575/600 V according to UL	Type: Class L, max. 1600 A; Iq = 30 kA
 usable for High Faults up to 575/600 V according to UL 	Type: Class L, max. 1200 A; Iq = 100 kA
operating power [hp] for 3-phase motors	
 at 200/208 V at 50 °C rated value 	150 hp
● at 220/230 V at 50 °C rated value	150 hp
● at 460/480 V at 50 °C rated value	350 hp
Electrical Safety	
protection class IP on the front according to IEC 60529	IP00; IP20 with cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover
TEX	
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1
PFHD with high demand rate according to IEC 61508 relating to ATEX	9E-6 1/h
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.09
hardware fault tolerance according to IEC 61508 relating to ATEX	0
	3 a
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	<i>-</i>
IEC 61508 relating to ATEX	Yes
IEC 61508 relating to ATEX certificate of suitability	
IEC 61508 relating to ATEX certificate of suitability • ATEX	Yes
IEC 61508 relating to ATEX certificate of suitability • ATEX • IECEX	Yes Yes











<u>KC</u>

For use in hazardous locations

Test Certificates

Marine / Shipping





Miscellaneous

Type Test Certificates/Test Report





Marine / Shipping

other

Environment



Confirmation



Siemens EcoTech



Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5076-2TB14

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5076-2TB14

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5076-2TB14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5076-2TB14\&lang=en}$

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5076-2TB14/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5076-2TB14&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917





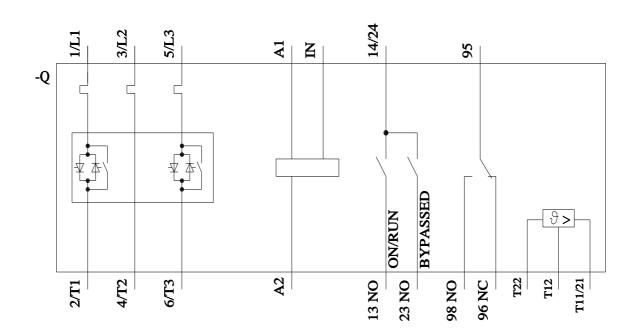

last modified: 4/1/2025 🖸

