



Electric Components > Products > Circular Connectors > Circular Connectors M 16 > M 16 Panel Connector, Male Thread, Front Mounting > Panel Connector, front mounting 7.840.000.000


Panel Connector, front mounting 7.840.000.000

Housing material	Die Casting
Operating-Temperature	-40 – 125 °C
Protection category	IP67/ IP69K plugged
Seals / O-Rings	Buna-N standard
Surface material	Nickel
Type	4 holes 2.7 mm, Flange 20 x 20 mm

4 holes Ø 2,7 mm (.11"), Flange 20 x 20mm

Additional information

// [Assembly instruction Panel Connector](#)

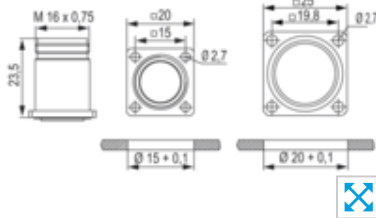

Certificates

