


Datasheet

Art.No. 02.125.3429.8

Female contact D 2,5- 0,5-1,5 QMM

Female contact, stamped Ø 2,5 mm, 0,5-1,5 mm², AWG 20-16, Ag

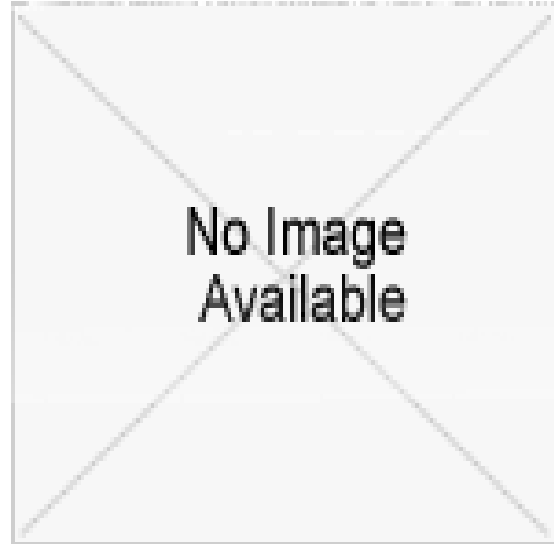

| | |
|------------|---------------|
| Art.No. | 02.125.3429.8 |
| EAN | 4015573450615 |
| Order unit | 100 pieces |

Approvals

Technical data

General

| | |
|--|----------------|
| Model | Bus connection |
| Wire strip length | 4 mm |
| Min. conductor cross section flexible wire | 0.5 |
| Max. conductor cross section flexible wire | 1.5 |
| Min. UL/CSA wire diameter flexible wire | 20 AWG |
| Max. UL/CSA wire diameter flexible wire | 16 AWG |
| Mating cycles | 500 |
| Connection type | Crimp |
| Material | Bronze |
| Massive contact | No |
| Contact pin diameter | 2.5 mm |
| Surface | Silver-plated |
| Inflammability class of insulation material acc. with UL94 | Other |
| Contact resistance | 5 mOhm |