



Figure similar

DIGITAL MONITORING RELAY FOR FAULT
CURRENT MONITORING (W. CURRENT
TRANSFORMER 3UL23) SETTING RANGE 0.03A TO
40A SEPARATE FOR ALARM THRESHOLD AND
SWITCH-OFF VALUE SUPPLY VOLTAGE AC/DC 24 ..
240 V, 50 .. 60 HZ STARTUP AND TRIPPING DELAY
0.1 TO 20S SWITCH-OFF HYSTERESIS UP TO 50%
ALARM HYSTERESIS 5% FIXED WIDTH 22.5 MM, 2
CO CONTACTS W. OR W/O ERROR LOG SCREW
TERMINAL

Product function		for three-phase supplies
Measuring circuit:		
Type of current for monitoring		AC
Measurable current	mA	10 ... 43 000
Measurable line frequency	Hz	16 ... 400
Adjustable response value current		
• 1	mA	30 ... 40 A
• 2	mA	30 ... 40 A
Adjustable response delay time when starting	s	0.1 ... 20
Buffering time in the event of power failure minimum	ms	10
Operating voltage Rated value	V	24 ... 240
Relative metering precision	%	5
Accuracy of digital display		+/-1 digit
Temperature drift per °C	%/°C	0.1
Relative repeat accuracy	%	1
General technical data:		
Design of the display		LCD
Product function		
• difference current indication		Yes
• Fault storage		Yes
• Overcurrent detection 1 phase		Yes
• undercurrent detection 1 phase		No
• External reset		Yes
• Adjustable open/closed-circuit current principle		Yes

Startup time after the control supply voltage has been applied	ms	1 600
Response time maximum	ms	100
Type of voltage of the control supply voltage		AC/DC
Control supply voltage • with AC — at 50 Hz Rated value — at 60 Hz Rated value • for DC Rated value	V V V	24 ... 240 24 ... 240 24 ... 240
Operating range factor control supply voltage rated value • with AC — at 50 Hz — at 60 Hz • for DC		0.85 ... 1.1 0.85 ... 1.1 0.85 ... 1.1
Surge voltage resistance Rated value	kV	4
Active power consumption	W	2
Protection class IP		IP20
Electromagnetic compatibility		IEC 60947-1 / IEC 61000-6-2 / IEC 61000-6-4
Vibration resistance acc. to IEC 60068-2-6		1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
Shock resistance acc. to IEC 60068-2-27		sinusoidal half-wave 15g / 11 ms
Installation altitude at height above sea level maximum	m	2 000
Conducted interference due to burst acc. to IEC 61000-4-4		2 kV
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5		2 kV
Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5		1 kV
Electrostatic discharge acc. to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling acc. to IEC 61000-4-3		10 V/m
Insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 Rated value	V	300
Degree of pollution		3
Ambient temperature • during operation • during storage • during transport	°C °C °C	-25 ... +60 -40 ... +85 -40 ... +85
Design of the electrical isolation		galvanic
Galvanic isolation • between entrance and outlet • between the outputs • between the voltage supply and other circuits		Yes Yes No

Mechanical data:

Width	mm	22.5
Height	mm	102
Depth	mm	91
mounting position		any
Required spacing for grounded parts		
• forwards	mm	0
• Backwards	mm	0
• at the side	mm	0
• upwards	mm	0
• downwards	mm	0
Required spacing with side-by-side mounting		
• forwards	mm	0
• Backwards	mm	0
• at the side	mm	0
• upwards	mm	0
• downwards	mm	0
Required spacing for live parts		
• forwards	mm	0
• Backwards	mm	0
• at the side	mm	0
• upwards	mm	0
• downwards	mm	0
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Product function removable terminal for auxiliary and control circuit		Yes
Type of electrical connection		screw-type terminals
Type of connectable conductor cross-section		
• solid		1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)
• finely stranded		
— with core end processing		1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
• for AWG conductors		
— solid		2x (20 ... 14)
— stranded		2x (20 ... 14)
Tightening torque with screw-type terminals	N·m	0.8 ... 1.2

Outputs:

Number of NO contacts delayed switching		0
Number of NC contacts delayed switching		0
Number of CO contacts delayed switching		2
Ampacity of the output relay		
• at AC-15		

— at 250 V at 50/60 Hz	A	3
— at 400 V at 50/60 Hz	A	0
• at DC-13		
— at 24 V	A	1
— at 125 V	A	0.2
— at 250 V	A	0.1
Operating current at 17 V minimum	mA	5
Continuous current of the DIAZED fuse link of the output relay	A	4
Thermal current of the switching element with contacts maximum	A	5
Mechanical service life (switching cycles) typical		10 000 000
Electrical endurance (switching cycles) at AC-15 at 230 V typical		100 000
Operating frequency with 3RT2 contactor maximum	1/h	5 000

Certificates/ approvals:

General Product Approval	Test Certificates	other
 	Type Test Certificates/Test Report	Special Test Certificate Declaration of Conformity other

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG46251CW30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3UG46251CW30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG46251CW30&lang=en

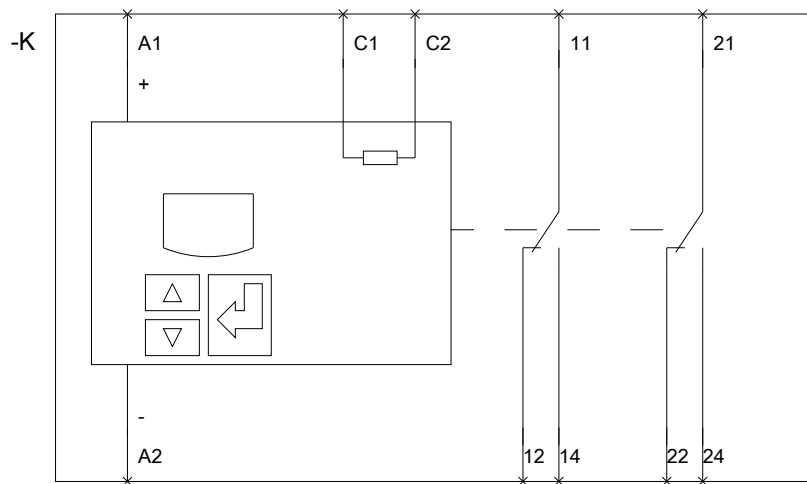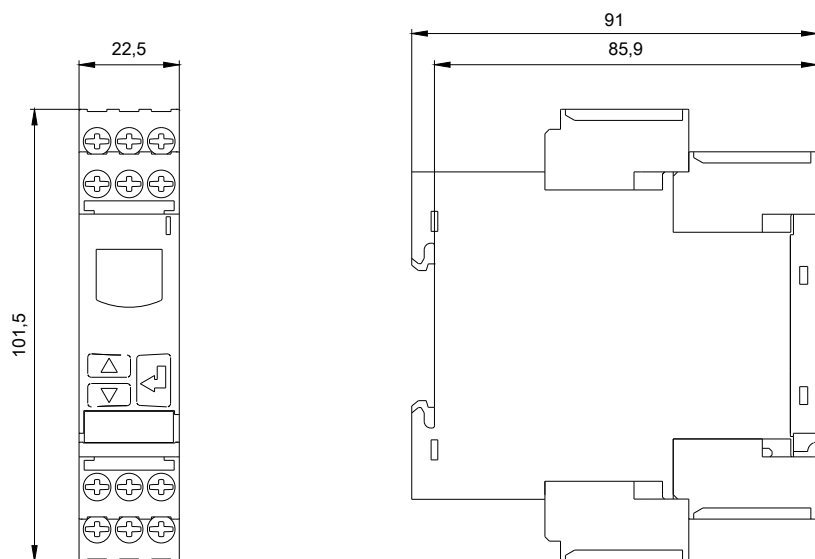

last modified:

16.03.2015