


# Ex Příslušenství

## RSD-MS-Ex-d

Metr.

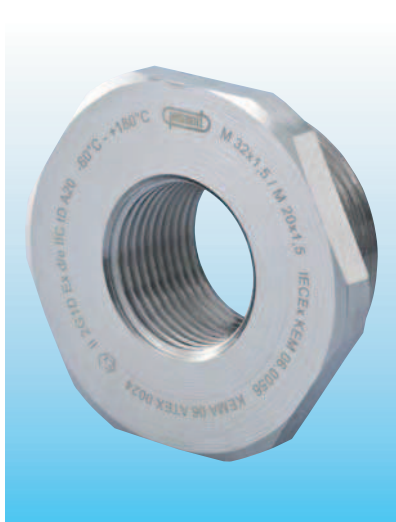


<b>Material</b>	poniklovaná mosaz
<b>O-kroužek</b>	NBR / VMQ
<b>Krytí</b>	IP 68 – 10 bar / IP 69K
<b>Pracovní teplota</b>	-20 °C – 95 °C (NBR) -60 °C – 180 °C (VMQ)



II 2G 1D Ex d IIC



Mezinárodní certifikáty najdete na str. 176 nebo na internetu: [www.hummel.com](http://www.hummel.com)



AG	IG	GL mm	H mm	mm	Obj. č NBR -20 °C – 95 °C	Obj. č VMQ -60 °C – 180 °C
M 16 x 1,5	M 12 x 1,5	16	19	19	1.878.1612.50	1.879.1612.50
M 20 x 1,5	M 12 x 1,5	16	19,5	22	1.878.2012.50	1.879.2012.50
M 20 x 1,5	M 16 x 1,5	16	19,5	22	1.878.2016.50	1.879.2016.50
M 25 x 1,5	M 16 x 1,5	16	19,5	30	1.878.2516.50	1.879.2516.50
M 25 x 1,5	M 20 x 1,5	16	19,5	30	1.878.2520.50	1.879.2520.50
M 32 x 1,5	M 16 x 1,5	16	20,5	41	1.878.3216.50	1.879.3216.50
M 32 x 1,5	M 20 x 1,5	16	20,5	41	1.878.3220.50	1.879.3220.50
M 32 x 1,5	M 25 x 1,5	16	20,5	41	1.878.3225.50	1.879.3225.50
M 40 x 1,5	M 20 x 1,5	16	21	46	1.878.4020.50	1.879.4020.50
M 40 x 1,5	M 25 x 1,5	16	21	46	1.878.4025.50	1.879.4025.50
M 40 x 1,5	M 32 x 1,5	16	21	46	1.878.4032.50	1.879.4032.50