

SITOR FUSE-LINK 450A, AC 800V, SIZE 2



Figure similar

Model		
product brand name		SETRON
Design of an identification indicator		front indicator
Design of the fuse link		SITOR, LV HRC design
General technical data		
Size of fuse system / acc. to DIN EN 60269-1		NH2
Operating class of the fuse link		aR
circuit-breaker / Design		3NE
Varying load factor (WL)		0.85
Supply voltage / at DC	V	440
Switching capacity		
Switching capacity current		
• acc. to IEC 60947-2 / rated value	kA	100
Dissipation		
Power loss [W]		
• for rated value of the current / at AC / in hot operating state / per pole	W	140
• maximum	W	140

Electricity		
rated current I _n / IEC, DIN/VDE / at 40 Cel	A	450
Current / at AC / rated value	A	450

Mechanical Design		
Mounting position		Any, preferably vertical

Environmental conditions		
Ambient temperature		
• minimum	°C	-20
• maximum	°C	50
Environmental category		-20 to +50 at 95% relative humidity

Certificates		
Equipment marking		
• acc. to DIN EN 61346-2		F
• acc. to DIN EN 81346-2		F
General Product Approval	Declaration of Conformity	other



[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NE43330B>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NE43330B/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE43330B

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

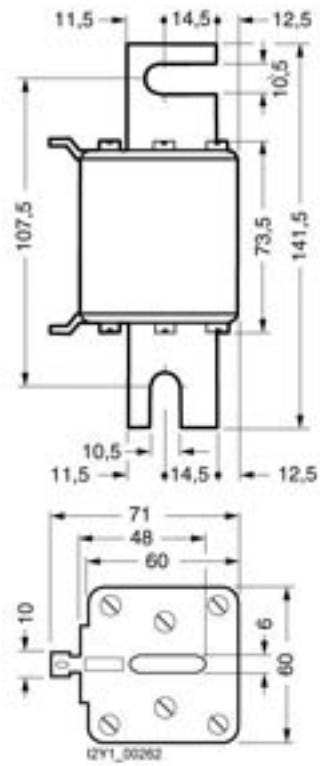

last modified:

02.02.2016