

Ordering data

6SL3210-1PE23-8AL0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data	General tech. specifications																																				
Input <table> <tr> <td>Number of phases</td><td>3 AC</td></tr> <tr> <td>Line voltage</td><td>380 ... 480 V ± 10 %</td></tr> <tr> <td>Line frequency</td><td>47 ... 63 Hz</td></tr> <tr> <td>Rated current (LO)</td><td>36.00 A</td></tr> <tr> <td>Rated current (HO)</td><td>33.00 A</td></tr> </table>	Number of phases	3 AC	Line voltage	380 ... 480 V ± 10 %	Line frequency	47 ... 63 Hz	Rated current (LO)	36.00 A	Rated current (HO)	33.00 A	<table> <tr> <td>Power factor λ</td><td>0.95</td></tr> <tr> <td>Offset factor $\cos \varphi$</td><td>0.99</td></tr> <tr> <td>Efficiency η</td><td>0.98</td></tr> <tr> <td>Sound pressure level (1m)</td><td>72 dB</td></tr> <tr> <td>Power loss</td><td>0.56 kW</td></tr> </table>	Power factor λ	0.95	Offset factor $\cos \varphi$	0.99	Efficiency η	0.98	Sound pressure level (1m)	72 dB	Power loss	0.56 kW																
Number of phases	3 AC																																				
Line voltage	380 ... 480 V ± 10 %																																				
Line frequency	47 ... 63 Hz																																				
Rated current (LO)	36.00 A																																				
Rated current (HO)	33.00 A																																				
Power factor λ	0.95																																				
Offset factor $\cos \varphi$	0.99																																				
Efficiency η	0.98																																				
Sound pressure level (1m)	72 dB																																				
Power loss	0.56 kW																																				
Output <table> <tr> <td>Number of phases</td><td>3 AC</td></tr> <tr> <td>Rated voltage</td><td>400 V</td></tr> <tr> <td>Rated power (LO)</td><td>18.50 kW / 25.00 hp</td></tr> <tr> <td>Rated power (HO)</td><td>15.00 kW / 20.00 hp</td></tr> <tr> <td>Rated current (LO)</td><td>38.00 A</td></tr> <tr> <td>Rated current (HO)</td><td>32.00 A</td></tr> <tr> <td>Max. output current</td><td>64.00 A</td></tr> <tr> <td>Pulse frequency</td><td>4 kHz</td></tr> <tr> <td>Output frequency for vector control</td><td>0 ... 200 Hz</td></tr> <tr> <td>Output frequency for V/f control</td><td>0 ... 550 Hz</td></tr> </table>	Number of phases	3 AC	Rated voltage	400 V	Rated power (LO)	18.50 kW / 25.00 hp	Rated power (HO)	15.00 kW / 20.00 hp	Rated current (LO)	38.00 A	Rated current (HO)	32.00 A	Max. output current	64.00 A	Pulse frequency	4 kHz	Output frequency for vector control	0 ... 200 Hz	Output frequency for V/f control	0 ... 550 Hz	Ambient conditions <table> <tr> <td>Cooling</td><td>Internal air cooling</td></tr> <tr> <td>Cooling air requirement</td><td>0.055 m³/s</td></tr> <tr> <td>Installation altitude</td><td>1000 m</td></tr> </table> Ambient temperature <table> <tr> <td>Operation LO</td><td>-20 ... 40 °C (-4 ... 104 °F)</td></tr> <tr> <td>Operation HO</td><td>-20 ... 50 °C (-4 ... 122 °F)</td></tr> <tr> <td>Transport</td><td>-40 ... 70 °C (-40 ... 158 °F)</td></tr> <tr> <td>Storage</td><td>-40 ... 70 °C (-40 ... 158 °F)</td></tr> </table> Relative humidity <table> <tr> <td>Max. operation</td><td>95 % RH, condensation not permitted</td></tr> </table>	Cooling	Internal air cooling	Cooling air requirement	0.055 m ³ /s	Installation altitude	1000 m	Operation LO	-20 ... 40 °C (-4 ... 104 °F)	Operation HO	-20 ... 50 °C (-4 ... 122 °F)	Transport	-40 ... 70 °C (-40 ... 158 °F)	Storage	-40 ... 70 °C (-40 ... 158 °F)	Max. operation	95 % RH, condensation not permitted
Number of phases	3 AC																																				
Rated voltage	400 V																																				
Rated power (LO)	18.50 kW / 25.00 hp																																				
Rated power (HO)	15.00 kW / 20.00 hp																																				
Rated current (LO)	38.00 A																																				
Rated current (HO)	32.00 A																																				
Max. output current	64.00 A																																				
Pulse frequency	4 kHz																																				
Output frequency for vector control	0 ... 200 Hz																																				
Output frequency for V/f control	0 ... 550 Hz																																				
Cooling	Internal air cooling																																				
Cooling air requirement	0.055 m ³ /s																																				
Installation altitude	1000 m																																				
Operation LO	-20 ... 40 °C (-4 ... 104 °F)																																				
Operation HO	-20 ... 50 °C (-4 ... 122 °F)																																				
Transport	-40 ... 70 °C (-40 ... 158 °F)																																				
Storage	-40 ... 70 °C (-40 ... 158 °F)																																				
Max. operation	95 % RH, condensation not permitted																																				

Overload capability

Low Overload (LO)

1.1 \times output current rating (i.e., 110 % overload) for 57 s with a cycle time of 300 s 1.5 \times output current rating (i.e., 150 % overload) for 3 s with a cycle time of 300 s

High Overload (HO)

1.5 \times output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 \times output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s

SIEMENS

Data sheet for SINAMICS Power Module PM240-2

No image
available for this
configuration.


Ordering data

6SL3210-1PE23-8AL0

Figure similar

Mechanical data	Connections
Degree of protection	Line side
Size	Version
Net weight	Conductor cross-section
Width	Motor end
Height	Version
Depth	Conductor cross-section
Converter losses to EN 50598-2*	DC link (for braking resistor)

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-0.47 %

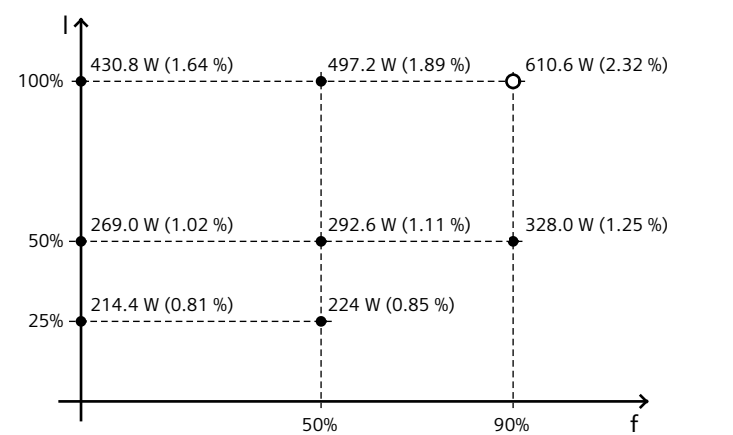

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*calculated values; increased by 10% according to the standard

Version	screw-type terminal
Conductor cross-section	10.00 ... 35.00 mm²
Version	Screw-type terminals
Conductor cross-section	10.00 ... 35.00 mm²
PE connection	Screw-type terminals

Shielded	200 m
Unshielded	300 m

Compliance with standards	UL, cUL, CE, C-Tick (RCM), SEMI F47
CE marking	According to low-voltage directive 2006/95/EC