



Figure similar

Ordering data

6SL3210-1KE15-8UF1

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data	General tech. specifications																																				
Input <table> <tr> <td>Number of phases</td><td>3 AC</td></tr> <tr> <td>Line voltage</td><td>380 ... 480 V +10 % -20 %</td></tr> <tr> <td>Line frequency</td><td>47 ... 63 Hz</td></tr> <tr> <td>Rated current (LO)</td><td>7.40 A</td></tr> <tr> <td>Rated current (HO)</td><td>6.00 A</td></tr> </table>	Number of phases	3 AC	Line voltage	380 ... 480 V +10 % -20 %	Line frequency	47 ... 63 Hz	Rated current (LO)	7.40 A	Rated current (HO)	6.00 A	<table> <tr> <td>Power factor λ</td><td>0.70 ... 0.85</td></tr> <tr> <td>Offset factor $\cos \varphi$</td><td>0.95</td></tr> <tr> <td>Efficiency η</td><td>0.97</td></tr> <tr> <td>Sound pressure level (1m)</td><td>52 dB</td></tr> <tr> <td>Power loss</td><td>0.09 kW</td></tr> </table>	Power factor λ	0.70 ... 0.85	Offset factor $\cos \varphi$	0.95	Efficiency η	0.97	Sound pressure level (1m)	52 dB	Power loss	0.09 kW																
Number of phases	3 AC																																				
Line voltage	380 ... 480 V +10 % -20 %																																				
Line frequency	47 ... 63 Hz																																				
Rated current (LO)	7.40 A																																				
Rated current (HO)	6.00 A																																				
Power factor λ	0.70 ... 0.85																																				
Offset factor $\cos \varphi$	0.95																																				
Efficiency η	0.97																																				
Sound pressure level (1m)	52 dB																																				
Power loss	0.09 kW																																				
Output <table> <tr> <td>Number of phases</td><td>3 AC</td></tr> <tr> <td>Rated voltage</td><td>400 V</td></tr> <tr> <td>Rated power (LO)</td><td>2.20 kW</td></tr> <tr> <td>Rated power (HO)</td><td>1.50 kW</td></tr> <tr> <td>Rated current (IN)</td><td>6.00 A</td></tr> <tr> <td>Rated current (LO)</td><td>5.60 A</td></tr> <tr> <td>Rated current (HO)</td><td>4.10 A</td></tr> <tr> <td>Max. output current</td><td>8.20 A</td></tr> <tr> <td>Pulse frequency</td><td>4 kHz</td></tr> <tr> <td>Output frequency for vector control</td><td>0 ... 240 Hz</td></tr> <tr> <td>Output frequency for V/f control</td><td>0 ... 650 Hz</td></tr> </table> In firmware V4.7 and higher, due to legal requirements, the maximum output frequency is restricted to 550 Hz.	Number of phases	3 AC	Rated voltage	400 V	Rated power (LO)	2.20 kW	Rated power (HO)	1.50 kW	Rated current (IN)	6.00 A	Rated current (LO)	5.60 A	Rated current (HO)	4.10 A	Max. output current	8.20 A	Pulse frequency	4 kHz	Output frequency for vector control	0 ... 240 Hz	Output frequency for V/f control	0 ... 650 Hz	Ambient conditions <table> <tr> <td>Cooling</td><td>Air cooling using an integrated fan</td></tr> <tr> <td>Cooling air requirement</td><td>0.005 m³/s</td></tr> <tr> <td>Installation altitude</td><td>1000 m</td></tr> </table> Ambient temperature <table> <tr> <td>Operation</td><td>-10 ... 40 °C (14 ... 104 °F)</td></tr> <tr> <td>Transport</td><td>-40 ... 70 °C (-40 ... 158 °F)</td></tr> <tr> <td>Storage</td><td>-40 ... 70 °C (-40 ... 158 °F)</td></tr> </table> Relative humidity <table> <tr> <td>Max. operation</td><td>95 % At 40 °C (104 °F), condensation and icing not permissible</td></tr> </table>	Cooling	Air cooling using an integrated fan	Cooling air requirement	0.005 m³/s	Installation altitude	1000 m	Operation	-10 ... 40 °C (14 ... 104 °F)	Transport	-40 ... 70 °C (-40 ... 158 °F)	Storage	-40 ... 70 °C (-40 ... 158 °F)	Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible
Number of phases	3 AC																																				
Rated voltage	400 V																																				
Rated power (LO)	2.20 kW																																				
Rated power (HO)	1.50 kW																																				
Rated current (IN)	6.00 A																																				
Rated current (LO)	5.60 A																																				
Rated current (HO)	4.10 A																																				
Max. output current	8.20 A																																				
Pulse frequency	4 kHz																																				
Output frequency for vector control	0 ... 240 Hz																																				
Output frequency for V/f control	0 ... 650 Hz																																				
Cooling	Air cooling using an integrated fan																																				
Cooling air requirement	0.005 m³/s																																				
Installation altitude	1000 m																																				
Operation	-10 ... 40 °C (14 ... 104 °F)																																				
Transport	-40 ... 70 °C (-40 ... 158 °F)																																				
Storage	-40 ... 70 °C (-40 ... 158 °F)																																				
Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible																																				
Overload capability <table> <tr> <td>Low Overload (LO)</td><td>150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time</td></tr> <tr> <td>High Overload (HO)</td><td>200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time</td></tr> </table>	Low Overload (LO)	150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time	High Overload (HO)	200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time	Closed-loop control techniques <table> <tr> <td>V/f linear / square-law / parameterizable</td><td>Yes</td></tr> <tr> <td>V/f with flux current control (FCC)</td><td>Yes</td></tr> <tr> <td>V/f ECO linear / square-law</td><td>Yes</td></tr> <tr> <td>Sensorless vector control</td><td>Yes</td></tr> <tr> <td>Vector control, with sensor</td><td>No</td></tr> <tr> <td>Encoderless torque control</td><td>No</td></tr> <tr> <td>Torque control, with encoder</td><td>No</td></tr> </table>	V/f linear / square-law / parameterizable	Yes	V/f with flux current control (FCC)	Yes	V/f ECO linear / square-law	Yes	Sensorless vector control	Yes	Vector control, with sensor	No	Encoderless torque control	No	Torque control, with encoder	No																		
Low Overload (LO)	150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time																																				
High Overload (HO)	200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time																																				
V/f linear / square-law / parameterizable	Yes																																				
V/f with flux current control (FCC)	Yes																																				
V/f ECO linear / square-law	Yes																																				
Sensorless vector control	Yes																																				
Vector control, with sensor	No																																				
Encoderless torque control	No																																				
Torque control, with encoder	No																																				
	Communication <table> <tr> <td>Communication</td><td>PROFINET</td></tr> </table>	Communication	PROFINET																																		
Communication	PROFINET																																				



Figure similar

Ordering data

6SL3210-1KE15-8UF1

Mechanical data	
Degree of protection	IP20 / UL open type
Size	FSA
Net weight	1.70 kg
Width	73.0 mm
Height	196.0 mm
Depth	225.0 mm

Inputs/ outputs	
-----------------	--

Standard digital inputs

Number	6
Switching level: 0→1	11 V
Switching level: 1→0	5 V
Max. inrush current	15 mA

Fail-safe digital inputs

Number	1
--------	---

Digital outputs

Number as relay changeover contact	1
Output (resistive load)	DC 30 V, 1 A
Number as transistor	1
Output (resistive load)	DC 30 V, 1 A

Analog/ digital inputs

Number	1 (Differential input)
--------	------------------------

Analog outputs

Number	1 (Non-isolated output)
--------	-------------------------

PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected: PTC, KTY and Thermo-Click, accuracy $\pm 5^\circ\text{C}$

Standards	
Compliance with standards	UL, cUL, CE, C-Tick (RCM)
CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC

Connections

Signal cable

Conductor cross-section	0.15 ... 1.50 mm ² (28 ... 16 AWG)
-------------------------	---

Line side

Version	Plug-in screw-type terminals
Conductor cross-section	1.00 ... 2.50 mm ² (16 ... 14 AWG)

Motor end

Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm ² (16 ... 14 AWG)

DC link (for braking resistor)


Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm ² (16 ... 14 AWG)
PE connection	On housing with M4 screw

Max. motor cable length

Shielded	50 m
Unshielded	100 m

Converter losses to EN 50598-2*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-74.20 %

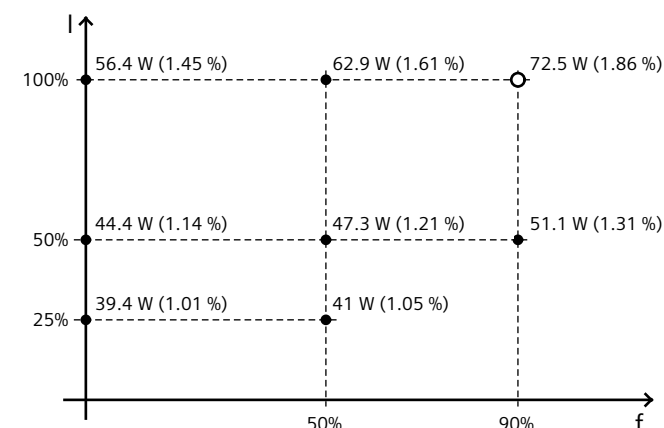

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values; increased by 10% according to the standard