

FUSE LINK CLASS CC ACC. TO UL STANDARD 248-4
QUICK-RESPONSE, CURRENT-LIMIT. RATED
CURRENT 25 A RATED VOLTAGE UP TO 600 V AC
SIZE 10.3 MM X 38.1 MM



Figure similar

Model		
product brand name		SETRON
Main circuit		
Operating voltage / rated value	V	600
Operating current / Rated value	A	25
Product details		
Product component / striker		No
Net weight	g	12
Equipment marking		
• acc. to DIN EN 61346-2		F
• acc. to DIN EN 81346-2		F



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NW2250-0HG>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NW2250-0HG/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW2250-0HG

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>



last modified:

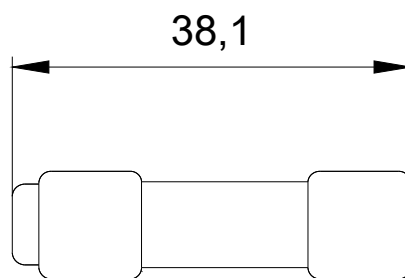

08/11/2016