


# EXIOS +Barrier nickel plated brass

Item number 1606200352

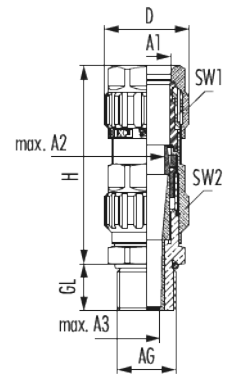

## Technical data

<b>Material</b>	Nickel-plated brass
<b>Seal</b>	VMQ (silicone)
<b>Material o-ring</b>	VMQ (silicone)
<b>Clamping insert</b>	Polyamide 6
<b>Armour</b>	Metallic armour or screen
<b>Compound</b>	Two-component epoxy compound
<b>Protection class</b>	IP 66 , IP 67 , IP 68 - 5bar/30min
<b>Ex-protection level</b>	Class I Div 2 Groups A,B,C,D , Class II Div 1 Groups E,F,G , I M2 Ex de , I M2 Ex ta IIIC Da , I Mb IIC Gb
<b>Temperature range</b>	-60°C to +85°C
<b>Variant</b>	Metric
<b>External thread (AG)</b>	M20 x 1,5
<b>Size</b>	20-3
<b>A1</b>	12,5 - 20,5 mm
<b>max. A2</b>	14 mm
<b>max. A3</b>	11,5 mm
<b>Thread length (GL)</b>	16 mm

# EXIOS +Barrier nickel plated brass

Item number 1606200352

Height (H)	73 mm
Wrench size (SW1/SW2)	30/30 mm
D	35 mm
max. No. cores	15
Armouring clamping ring 1	0 - 0,7 mm
Armouring clamping ring 2	0,7 - 1,4 mm
Tightening torque	12 Nm

# EXIOS +Barrier nickel plated brass

Item number 1606200352

## Commercial data

Packaging Unit	10
EAN code	4033878428160
Weight	0.27 kg
ETIM 7	EC000441
ETIM 8	EC000441
ETIM 9	EC000441
eCl@ss 10.1	27-14-44-34
Customs tariff number	74198090

## Note:

