

box terminal; 3 units accessory for: 3VA52



Model	
product brand name	SENTRON
product designation	box terminal 3 units
design of the product	Connection method
accessories	Box terminal
General technical data	
designation / of the terminal	TS1.2
type of electrical connection / with control wire tap	No
Mechanical Design	
Net Weight	166 g
Connections according IEC	
connectable conductor cross-section	
• for copper cable / stranded / minimum	6 mm ²
• for copper cable / stranded / maximum	120 mm ²
type of connectable conductor cross-sections / of the laminated conductor rails	
• minimum	3 x 13mm x 0.5mm, 2 x 15.5mm x 0.8mm, 2 x 20mm x 1mm
• maximum	6 x 13mm x 0.5mm, 6 x 15.5mm x 0.8mm, 6 x 20mm x 1mm
stripped length	19 mm
tightening torque / when using copper cables	
• solid	6 - 16 mm ² : 6 Nm
• stranded	6 - 25 mm ² : 6 Nm; 35 - 120 mm ² : 10 Nm
• finely stranded	10 - 25 mm ² : 6 Nm 35 - 95 mm ² : 10Nm
• finely stranded / with core end processing	10 - 25 mm ² : 6 Nm, 35 - 95 mm ² : 10Nm
Connetctions according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
stripped length	0.75 in
connectable conductor cross-section	
• for copper cable / solid / minimum	10 AWG
• for copper cable / solid / maximum	10 AWG
• for copper cable / stranded / minimum	10 AWG
• for copper cable / stranded / maximum	3/0 AWG
tightening torque / when using copper cables	
• solid	10 AWG : 105 lb-in
• stranded	10 - 4 AWG: 105 lb-in, 3 - 3/0 AWG: 140 lb-in
Certificates	
General Product Approval	



[Miscellaneous](#)



General Product Approval	EMV	Maritime application	other	Environment
--------------------------	-----	----------------------	-------	-------------

[Confirmation](#)



[Miscellaneous](#)

[Confirmation](#)

[Environmental Confirmations](#)

Environment

[Environmental Confirmations](#)



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9233-0JA11>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9233-0JA11>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9233-0JA11

CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

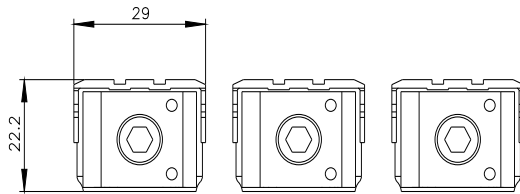

last modified:

4/6/2026 

