SIEMENS

Product data sheet

3NA3480



LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH FRONT INDICATOR SIZE 4, 1000A, AC 500V/DC 440V

Similar to image

Technical data:				
product brand name		SENTRON		
Product designation		LV HRC fuse link		
Current / for AC / rated value	А	1,000		
Operating class of the fuse link		gG		
Size of the fallback-system / acc. to DIN EN 60269-1		NH4		
Supply voltage				
for AC / rated value	V	500		
• for DC	V	400		
Switching capacity current				
• in accordance with IEC 60947-2 / rated value	kA	120		
• with DC / in accordance with IEC 60947-2 / rated value	kA	25		
Design of the fuse link		LV HRC fuse link		
Design of an identification indicator		Front indicators		
Mounting type		Non-insulated grip lugs		
mounting position		Any, preferably vertical		
Protection class IP		IP20, with connected conductors		
Climatic class		-20 to +50 at 95% relative humidity		
Ambient temperature	°C	-5 +40		

Ambient temperature / during storage / note		Air humidity 90% at 20 °C
Design of the switching contact		Non-corroding, silver-plated
Net weight	g	2,566
Item designation		
according to DIN EN 61346-2		F
according to DIN EN 81346-2		F


Certificates/approvals:

General Product	Approval	Declaration of Conformity	Test Certificates		other
GOST		EG-Konf.	Special Test Certificate	<u>Type Test</u> Certificates/Test <u>Report</u>	Environmental Confirmations

Further information:	
Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/lowvoltage/catalogs	
Industry Mall (Online ordering system) https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NA3480	
Service&Support (Manuals, Certificates, Characteristics, FAQs,) http://support.automation.siemens.com/WW/view/en/3NA3480/all	
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams,) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3480	
CAx-Online-Generator	

http://www.siemens.com/cax

Tender specifications
Datanorm GAEB81 GAEB83 RTF TXT

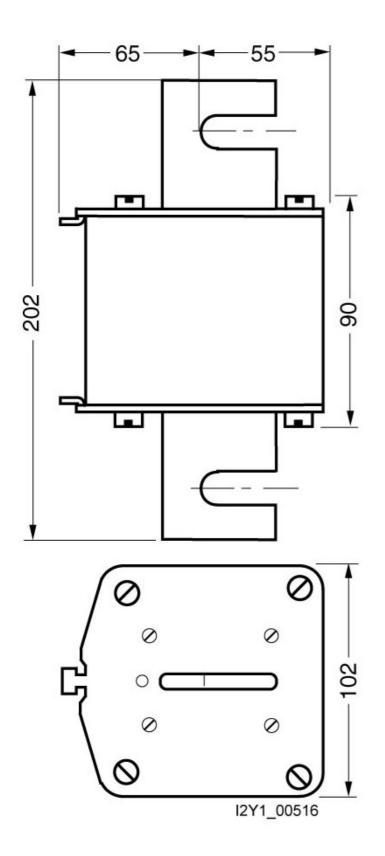

last change:

Jul 14, 2014