

LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH FRONT INDICATOR SIZE 00, 80A, AC 690V/DC 250V



Figure similar

Model		
product brand name		SETRON
Product designation		LV HRC fuse link
Design of an identification indicator		Front indicators
Design of the switching contact		Non-corroding, silver-plated
Design of the fuse link		LV HRC fuse link
General technical data		
Size of fuse system / acc. to DIN EN 60269-1		NH00
Operating class of the fuse link		gG
circuit-breaker / Design		3NA3
Mounting type		Non-insulated grip lugs
Supply voltage		
• at AC / rated value	V	690
• at DC	V	250
Protection class		
Protection class IP		IP20, with connected conductors
Switching capacity		
Switching capacity current		

- at DC / acc. to IEC 60947-2 / rated value
- acc. to IEC 60947-2 / rated value

kA	25
kA	120

Dissipation

Power loss [W]

- for rated value of the current / at AC / in hot operating state / per pole

W	6.94
---	------

Electricity

rated current I_n / IEC, DIN/VDE / at 40 °C

A	76
---	----

Current / at AC / rated value

A	80
---	----

Mechanical Design

Mounting position

	Any, preferably vertical
--	--------------------------

Net weight

g	189
---	-----

Environmental conditions

Ambient temperature

- minimum
- maximum
- during storage / Note

°C	-5
°C	40
	Air humidity 90% at 20 °C

Environmental category

	-20 to +50 at 95% relative humidity
--	-------------------------------------

Certificates

Equipment marking

- acc. to DIN EN 61346-2
- acc. to DIN EN 81346-2

F
F

General Product Approval

Declaration of Conformity

Test Certificates



[Typprüfbescheinigung/Werkszeugnis](#)

[spezielle Prüfbescheinigungen](#)

n

Test Certificates

Shipping Approval

other

[sonstig](#)



GL

[Umweltbestätigung](#)

[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NA38246>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NA38246/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA38246

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

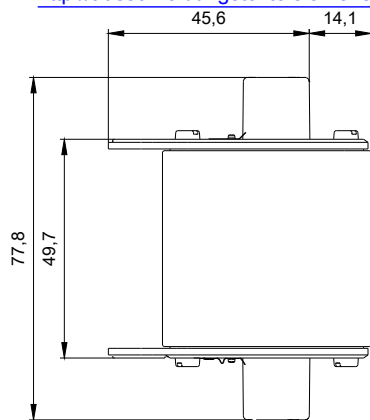

last modified:

22.03.2016